Technical data sheet Screw plug, PG thread

Item number: 2090112





Screw plug N in accordance with DIN 46320, with PG thread to DIN 40430.

In conjunction with sealing ring, types 107, 170 or 171, protection rating IP68 (5 bar/1 hr).

Sealing ring not contained in the scope of delivery.

* Prices according to DEL notation.

CuZi 37

Brass

N

Nickel-plated


Master data

Item number	2090112	
Туре	168 MS PG11	
Description 1	Screw plug	
Manufacturer	OBO	
Dimension	PG11	
Material	Brass	
Surface	Nickel-plated	
Surface standard		
Smallest sales unit	100	
Unit of quantity	Piece	
Weight	0.84 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to- Gate	0,0216 kg COe / 1 Piece	

Technical data sheet Screw plug, PG thread





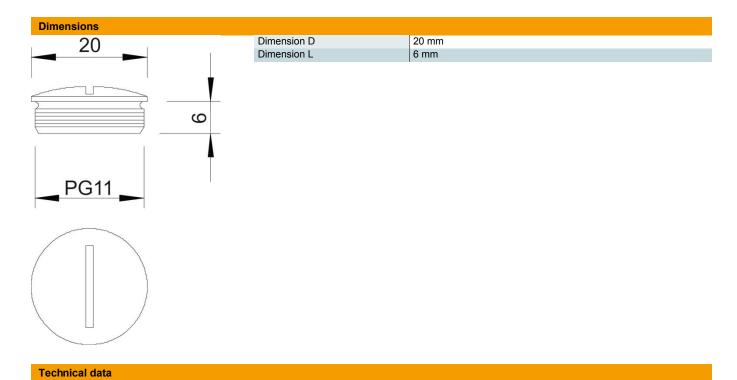

exp	plosion-proof	no
For	or Ex zone gas	Without
For	or Ex zone dust	Without
Thi	read	Pg 11
Thi	read type	PG
No	ominal thread size metric/PG	11
Thi	read increase	1.41 mm
Fib	ore-glass reinforced	no
На	alogen-free	yes
Imp	pact-resistant	no
Pro	otection rating	IP68