

# Technical data sheet

Clamp clip 2056, F-foot, 2-fold, plastic pressure sleeve, FT

Item number: 1187627



Clamp clip with F-foot, plastic pressure sleeve made of polypropylene. For vertical and horizontal mounting of 2 single cables on flat bars. With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. Multiple cables should be separated by double sleeves. We recommend the use of a counter-sleeve.



St

Steel

FT

Hot-dip galvanised

## Master data

|                                   |                         |
|-----------------------------------|-------------------------|
| Item number                       | 1187627                 |
| Type                              | BS-F2-K-34 FT           |
| Description 1                     | Clamp clip 2056         |
| Description 2                     | double                  |
| Manufacturer                      | OBO                     |
| Dimension                         | 28-34mm                 |
| Material                          | Steel                   |
| Surface                           | Hot-dip galvanised      |
| Surface standard                  | DIN EN ISO 1461         |
| Smallest sales unit               | 50                      |
| Unit of quantity                  | Piece                   |
| Weight                            | 9.9 kg                  |
| Weight unit                       | kg/100 pc.              |
| CO Footprint (GWP) Cradle-to-Gate | 0,2692 kg COe / 1 Piece |


# Technical data sheet

Clamp clip 2056, F-foot, 2-fold, plastic pressure sleeve, FT

Item number: 1187627



## Dimensions

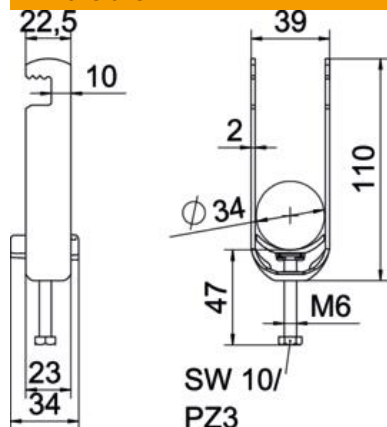

|                  |         |
|------------------|---------|
| Length           | 22.5 mm |
| Width            | 39 mm   |
| Height           | 110 mm  |
| Plate thickness  | 2 mm    |
| Dimension A      | 22.5 mm |
| Dimension B      | 39 mm   |
| Dimension C      | 34 mm   |
| Dimension G (mm) | M6      |
| Dimension H      | 110 mm  |
| Dimension L      | 47 mm   |
| Dimension t      | 2 mm    |

## Technical data

|                               |                |
|-------------------------------|----------------|
| Number of cables/pipes        | 2              |
| For pipe diameter, max.       | 34 mm          |
| For pipe diameter, min.       | 28 mm          |
| Thread                        | M6             |
| Halogen-free                  | yes            |
| Length of external dimensions | 34 mm          |
| Max. Tightening torque        | 3 Nm           |
| With plastic trough           | yes            |
| Mounting type                 | Flat profile   |
| Slot width                    | 10 mm          |
| Clamping range D, max.        | 34 mm          |
| Clamping range D, min.        | 28 mm          |
| Surface addition              | hot galvanised |
| Material addition             | Steel          |
| With counter-trough           | no             |
| Material of trough            | Plastic        |
| Material quality of trough    | Polypropylene  |