

# Technical data sheet

Underfloor duct, 2 pieces, 2-compartment, duct height  
58 mm

Item number: 7400271



Underfloor trunking (2 piece) for routing cables in screed-covered underfloor systems, according to EN 50085-2-2. Removable and continuously lockable trunking cover. With separating retainers in the trunking base. Maximum load-bearing capacity to 1.5 kN. Only compatible with the UZD250-4/350-4  
The profiled side walls offer a locking mechanism to lock the duct cover onto the duct base. The stiffening beads in the duct cover serve to create stability.



|    |                  |
|----|------------------|
| St | Steel            |
| FS | Strip galvanized |

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7400271                  |
| Type                               | S2 25058-2               |
| Description 1                      | Underfloor duct, 2-part  |
| Description 2                      | 2 compartments           |
| Manufacturer                       | OBO                      |
| Dimension                          | 2000x250x58              |
| Material                           | Steel                    |
| Surface                            | Strip galvanized         |
| Surface standard                   | DIN EN 10346             |
| Smallest sales unit                | 2                        |
| Unit of quantity                   | Metre                    |
| Weight                             | 433.453 kg               |
| Weight unit                        | kg/100 m                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 9,5718 kg CO2e / 1 Meter |


# Technical data sheet

Underfloor duct, 2 pieces, 2-compartment, duct height  
58 mm

Item number: 7400271



## Dimensions

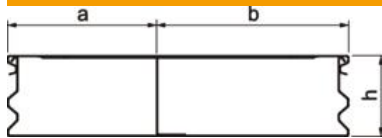

|             |          |
|-------------|----------|
| Length      | 2,000 mm |
| Width       | 250 mm   |
| Height      | 58 mm    |
| Dimension a | 110 mm   |
| Dimension b | 140 mm   |
| Dimension h | 58 mm    |

## Technical data

|                                |                       |
|--------------------------------|-----------------------|
| Number of fixed partitions     | 1                     |
| Number of compartments         | 2 St.                 |
| Mounting system fastening type | Floor                 |
| Floor plate                    | yes                   |
| Application area               | Screed-covered        |
| Decouplable                    | no                    |
| Trunking width, min.           | 250 mm                |
| Duct height, min.              | 58 mm                 |
| Usable cross-section           | 13300 mm <sup>2</sup> |
| Removable cover                | yes                   |
| Cross-section, draw a          | 5800 mm <sup>2</sup>  |
| Cross-section, draw b          | 7500 mm <sup>2</sup>  |
| Vertical load, large area      | to 1,500 N            |